TGRCN02

GLASTONBRY Tap Range Glastonbury BSM Brushed Nickel



|--|--|

Features:

- Long life 1/4 turn ceramic disc valves for added durability and smooth control.
- Robust metal fixing nut to secure the tap in place reducing the risk of loosening over time.
- On trend brushed nickel finish.
- 10 year parts and I year labour guarantee for peace of mind.
- Also available in other finishes.
- Co-ordinating Bathroom taps, Recess shower and Accessories available.

Product Certifications:






Additional Information:

Product Type: Main Construction Material: Brass Mount Type: Deck Mounted Handle Type: Lever Handle Connection Inlet: G3/4" BSP Connection Outlet: Open Number of Tap Holes: 2 Valve/Cartridge Type: Plumbing System Requirements: Suitable for all plumbing systems Minimum Dynamic Pressure (bar): Maximum Hot Water Temperature "C: Maximum Static Pressure (bar): Flow Type: Bathroom Taps Brass Brass Deck Mounted Brass Deck Mounted Lever Handle Cay-1" BSP Open 1/4 Turn 3/4" Ceramic Disc Valve Plumbing systems 0.2 bar 60° C Maximum Hot Water Temperature "C: Maximum Static Pressure (bar): 10 bar Flow Type: Single Flow	Specification					
Mount Type: Deck Mounted Lever Handle Connection Inlet: G3/4" BSP Connection Outlet: Open Number of Tap Holes: Valve/Cartridge Type: Plumbing System Requirements: Minimum Dynamic Pressure (bar): Maximum Dynamic Pressure (bar): Maximum Hot Water Temperature "C: Maximum Static Pressure (bar): 10 bar	Product Type:	Bathroom Taps				
Handle Type: Connection Inlet: G3/4" BSP Connection Outlet: Open Number of Tap Holes: 2 Valve/Cartridge Type: 1/4 Turn 3/4" Ceramic Disc Valve Plumbing System Requirements: Suitable for all plumbing systems Minimum Dynamic Pressure (bar): Maximum Dynamic Pressure (bar): 5.0 bar Maximum Hot Water Temperature °C: Maximum Static Pressure (bar): 10 bar	Main Construction Material:	Brass				
Connection Inlet: G3/4" BSP Connection Outlet: Open Number of Tap Holes: 2 Valve/Cartridge Type: 1/4 Turn 3/4" Ceramic Disc Valve Plumbing System Requirements: Suitable for all plumbing systems Minimum Dynamic Pressure (bar): 0.2 bar Maximum Dynamic Pressure (bar): 5.0 bar Maximum Hot Water Temperature °C: 60° C Maximum Static Pressure (bar): 10 bar	Mount Type:	Deck Mounted				
Connection Outlet: Number of Tap Holes: Valve/Cartridge Type: Plumbing System Requirements: Minimum Dynamic Pressure (bar): Maximum Dynamic Pressure (bar): Maximum Hot Water Temperature °C: Maximum Static Pressure (bar): 1/4 Turn 3/4" Ceramic Disc Valve Suitable for all plumbing systems 0.2 bar 6.0 bar	Handle Type:	Lever Handle				
Number of Tap Holes: Valve/Cartridge Type: Plumbing System Requirements: Minimum Dynamic Pressure (bar): Maximum Dynamic Pressure (bar): Maximum Hot Water Temperature °C: Maximum Static Pressure (bar): 1/4 Turn 3/4" Ceramic Disc Valve Suitable for all plumbing systems 0.2 bar 6.0 bar	Connection Inlet:	G3/4" BSP				
Valve/Cartridge Type: 1/4 Turn 3/4" Ceramic Disc Valve Plumbing System Requirements: Suitable for all plumbing systems Minimum Dynamic Pressure (bar): 0.2 bar Maximum Dynamic Pressure (bar): 5.0 bar Maximum Hot Water Temperature °C: 60 °C Maximum Static Pressure (bar): 10 bar	Connection Outlet:	Open				
Plumbing System Requirements: Minimum Dynamic Pressure (bar): Maximum Dynamic Pressure (bar): 5.0 bar Maximum Hot Water Temperature °C: Maximum Static Pressure (bar): 10 bar	Number of Tap Holes:	2				
Minimum Dynamic Pressure (bar): Maximum Dynamic Pressure (bar): 5.0 bar Maximum Hot Water Temperature °C: Maximum Static Pressure (bar): 10 bar	Valve/Cartridge Type:	1/4 Turn 3/4" Ceramic Disc Valve				
Maximum Dynamic Pressure (bar): 5.0 bar Maximum Hot Water Temperature °C: 60 °C Maximum Static Pressure (bar): 10 bar	Plumbing System Requirements:	Suitable for all plumbing systems				
Maximum Hot Water Temperature °C: 60° C Maximum Static Pressure (bar): 10 bar	Minimum Dynamic Pressure (bar):	0.2 bar				
Maximum Static Pressure (bar): 10 bar	Maximum Dynamic Pressure (bar):	5.0 bar				
	Maximum Hot Water Temperature °C:	60°C				
Flow Type: Single Flow	Maximum Static Pressure (bar):	10 bar				
	Flow Type:	Single Flow				
Isolation Included: No	Isolation Included:	No				

Dimensions (measurements in mm)

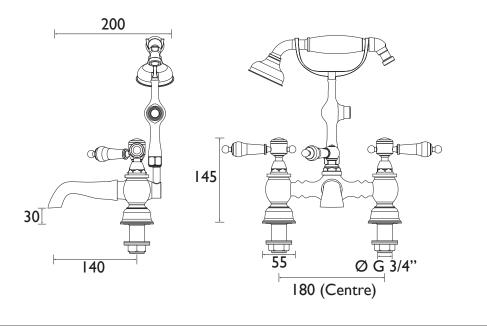

Flow Rates (l/min)								
System Pressure (bar)	0.2	0.5	1	2	3	5		
TGRCN02 (mixed)	19.3	30.6	43.6	61.6	75	95.5		

Technical Data Sheet



